


A240 NAMUR Type 3/2 - 5/2 Convertible Solenoid Valves

A240 type solenoid valves are designed for direct assembly on rotary type NAMUR interface pneumatic valve actuators.

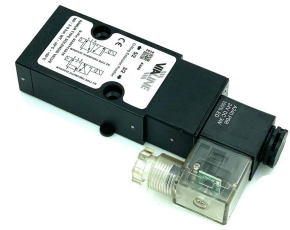

NAMUR Type Solenoid Valves

Technical Specifications,


- * Direct mounting on NAMUR interface actuators
- * Easy convertible between 3/2 and 5/2 way(DA or SR)
- * Lockable manual operator
- * Standard IP65 enclosure single coil (spring return)

Optional,

- * Dual coil construction
- * Eex m II T5 explosion proof coil


Technical Specifications,

Power Supply	12 VDC	24 VDC	24 VAC	110 VAC	220 VAC
Power Consumption	3W	3W	5VA	5VA	5VA
Air Supply	G 1/4"				
Working Pressure	2 - 10 bar				
Protection Class	IP65 (Optional Eex m II T5 ATEX)				
Working Temperature	-10 0C ~ + 70 0C				
Flow Capacity	720 Lt/min				

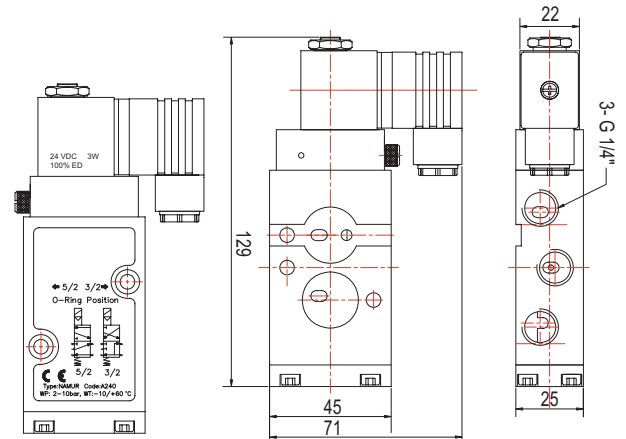

Accessories for Solenoid Valves	
Model	Description
A240PB	9mm Coil, IP65
A240PBX	9mm Coil, Exproof "m" Class"
A240SP	Standard Socket
A240SPL	Socket with LED

A244 NAMUR Type 5/3 Dual Coil Solenoid Valves

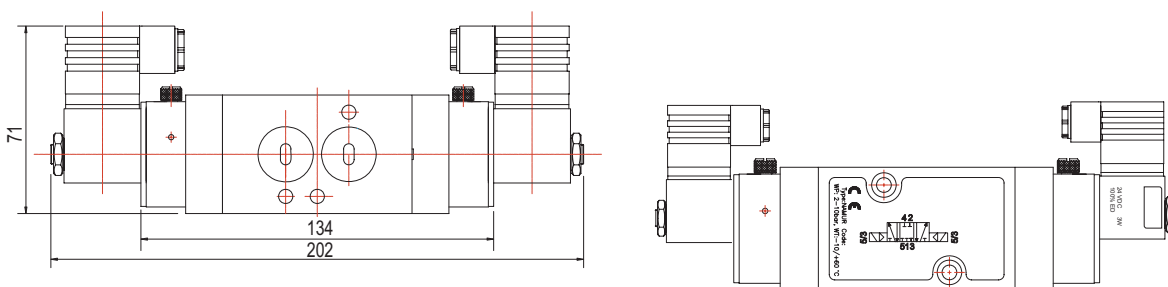

A246 NAMUR Type Air Pilot Operated Solenoid Valves

